



187217



**JTP SERIES LEVER HOISTS WITH OVERLOAD PROTECTION**

- Standard slip-clutch overload protection
- High strength to weight ratio
- Optional point hooks make this tool indispensable in shipbuilding and fabricating applications
- Lightweight, heavy-duty lever hoist features built-in automatic overload protection
- 3/4-ton to 3-ton capacities
- 5' and 15' lifts standard, custom length lifts available
- Gradual slip clutch provides automatic overload protection
- All steel construction with a durable powder coat finish
- Completely enclosed Weston type automatic brake system holds load in any position
- Easy-to-use with single hand operation and control
- Simple design makes routine inspection and maintenance easy
- Freewheeling feature without load for quick load attachment
- Lever hoist will not freewheel while under load
- Hardened grade 80 low wear chain
- Drop forged hooks with heavy-duty safety latches swivel 360° for easy rigging
- Proof tested with test certificate
- Complies with OSHA, ANSI/ASME B30.21 and HST-3 standards

**CAUTION**

Be sure that the supporting structures and load-attaching devices used in conjunction with this hoist provide an adequate safety factor to handle the rated load plus the weight of the equipment. If in doubt, consult a qualified structural engineer. This equipment is not to be used for lifting, supporting or transporting people, or lifting or supporting loads over people.

**IMPORTANT**


Before installation, read owner's manual for additional warnings and precautions. Not for use in an explosive environment.

**OPTIONAL ACCESSORIES**

- Trolleys
- Beam Clamps
- Slings
- Shipyard or Point Hooks



STOCK NO.	MODEL	DESCRIPTION	NET WEIGHT
187227	JTP150-TPH	Top Point Hook for JTP-150 Only	2
187228	JTP150-BPH	Bottom Point Hook for JTP-150 Only	2
187237	JTP300-TPH	Top Point Hook for JTP-300 Only	4
187238	JTP300-BPH	Bottom Point Hook for JTP-300 Only	4

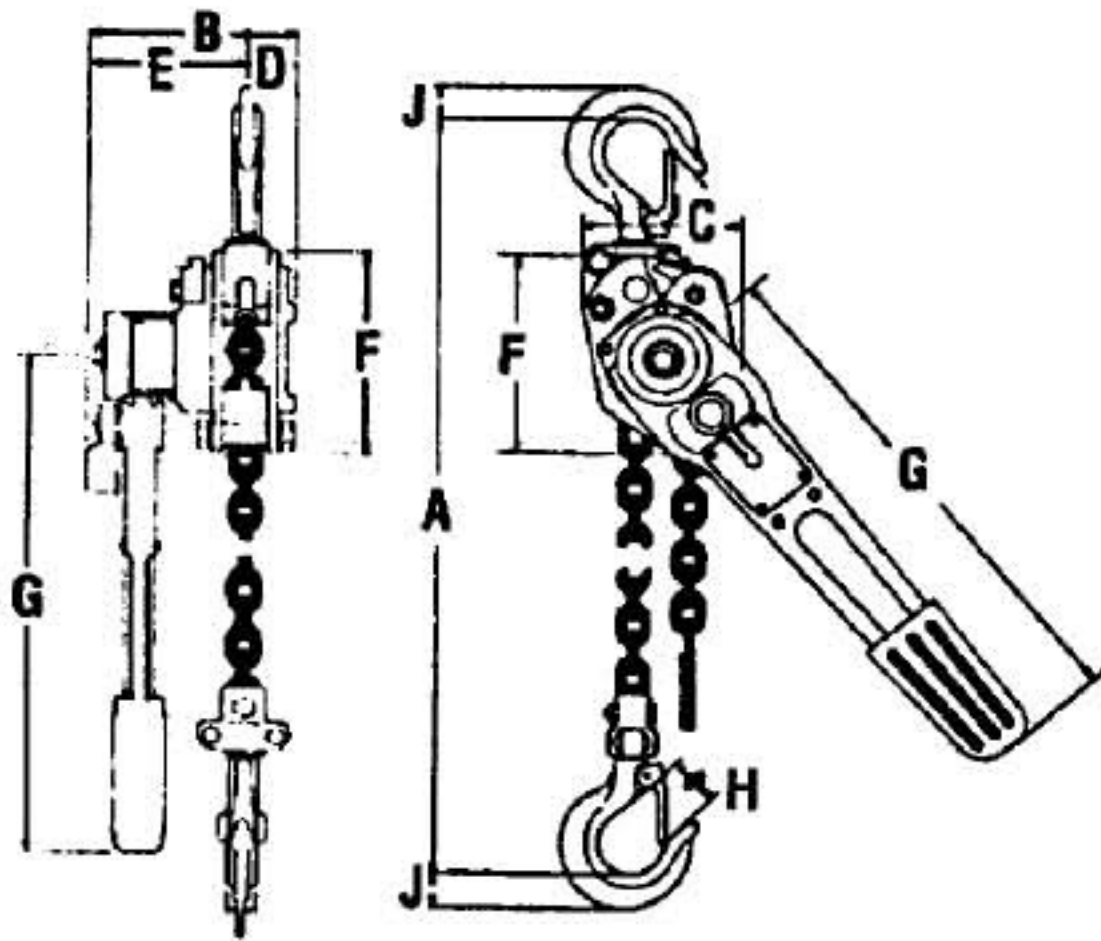

DIMENSIONS (IN.)

Model	A	B	C	D	E	F	G	H	I	J
JTP-75	12-7/16	5-3/4	14-15/16	2-3/8	3-7/16	5	10-1/4	1-7/16	9/16	1
JTP-150	14	7	5-3/4	2-7/8	4-1/8	6	16-1/8	1-3/4	11/16	1-1/4
JTP-300	19-3/4	8	7-9/16	3-5/8	4-5/16	8-1/2	16-1/8	2-1/8	1	1-3/4

STOCK NUMBER	MODEL	LOAD CHAIN (DIA./MM)	NUMBER OF FALLS	RATED CAPY (TON)	MIN. DIST. BETWEEN HOOKS (IN.)	STD. LIFT (FT.)	LBS. PULL TO LIFT CAPACITY	LEVER LENGTH (IN.)	LIFT PER FULL TURN OF LEVER (IN.)	NET WEIGHT (LBS.)
187206	JTP-75-5	6	1	3/4	12-7/16	5	32	10-1/4	3/4	16
187208	JTP-75-15	6	1	3/4	12-7/16	15	32	10-1/4	3/4	21
187215	JTP-150-5	8	1	1-1/2	14	5	42	16-1/8	7/8	26
187217	JTP-150-15	8	1	1-1/2	14	15	42	16-1/8	7/8	36
187230	JTP-300-5	10	1	3	19-3/4	5	72	16-1/8	5/8	59
187232	JTP-300-15	10	1	3	19-3/4	15	72	16-1/8	5/8	59

JET MATERIAL HANDLING