



187515



## MINI-MITE SERIES LEVER HOISTS

- Compact size fits easily in a truck or toolbox
- A size for every need
- Dependable, lightweight and portable heavy-duty lever hoist for industrial applications
- 1/4-ton to 6-ton capacities
- 5', 10', 15' and 20' lifts standard, custom length lifts available
- All steel construction with a powder coat finish
- Easy-to-use with single hand operation and control
- Simple design makes routine inspection and maintenance easy
- Freewheeling feature without load for quick load attachment
- Premium 100 grade low wear chain resists abrasion
- Completely enclosed Weston type automatic brake system for precise load positioning
- Wide throat safety hooks feature heavy-duty latches for easy rigging
- Proof tested with test certificate
- Complies with OSHA, ANSI/ASME B30.21 and HST-3 standards

**CAUTION**

Be sure that the supporting structures and load-attaching devices used in conjunction with this hoist provide an adequate safety factor to handle the rated load plus the weight of the equipment. If in doubt, consult a qualified structural engineer. This equipment is not to be used for lifting, supporting or transporting people, or lifting or supporting loads over people.


**IMPORTANT**

Before installation, read owner's manual for additional warnings and precautions. Not for use in an explosive environment.

**OPTIONAL ACCESSORIES**

- Trolleys
- Beam Clamps
- Slings



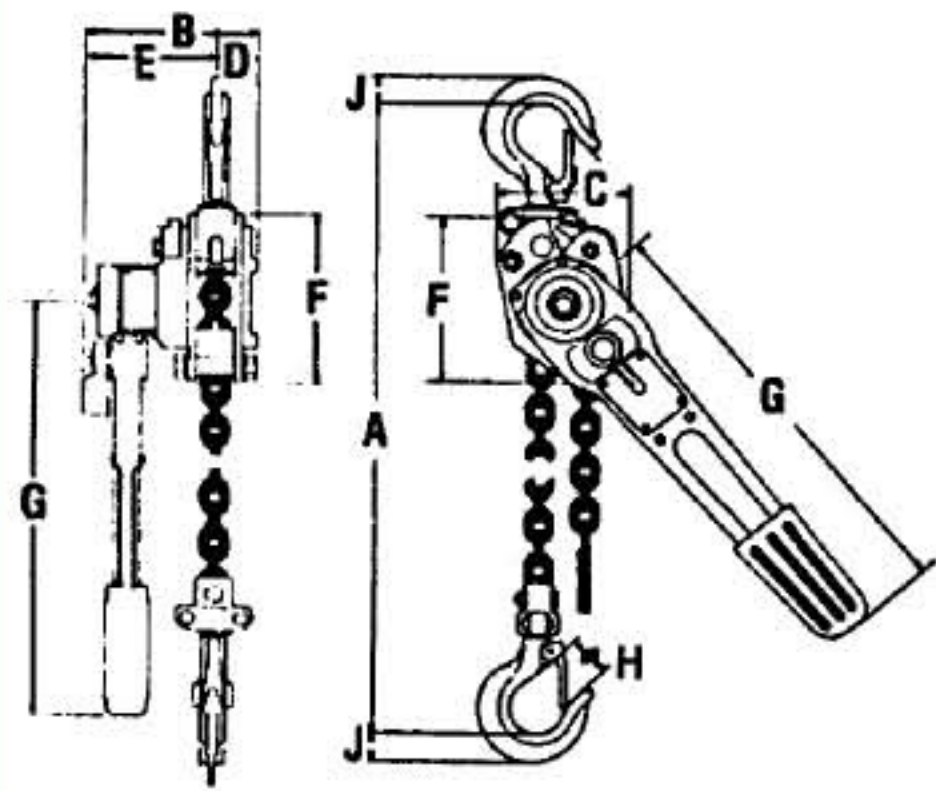

**DIMENSIONS (IN.)**

Model	A	B	C	D	E	F	G	H	I	J
MM-25,26	9-1/4	3-9/16	-	5/64	2-3/4	-	6-3/32	15/16	15/32	-
MM-50,51,52,53	10-1/4	4-5/16	3-3/8	1-3/64	3-1/4	4-7/16	11-3/16	13/16	5/8	11/16
MM-75,751,52	9-3/4	5-7/8	4-7/8	2-3/8	3-1/2	4-7/8	10-5/64	1	7/8	7/8
MM-150,151,152,155	13	6-3/4	5-5/8	2-5/8	3-5/8	5-7/8	17-5/16	1-1/4	1-1/8	1-1/8
MM-300,310,320,355	16-3/4	8-1/8	7-1/4	3-1/2	4-1/2	7-1/4	17-5/16	1-5/8	1-5/16	1-5/8
MM-600,620	24-1/2	8-1/8	9-5/8	3-1/2	4-1/2	7-1/4	17-5/16	2	1-9/16	2

STOCK NO.	MODEL	LOAD CHAIN (DIA./MM)	NO. OF FALLS	RATED CAPY (TON)	LIFT PER FULL TURN OF LEVER (IN)	MIN DIST BETWEEN HOOKS (IN)	STANDARD LIFT (FT)	LBS PULL TO LIFT CAPY	LEVER LENGTH (IN)	SHIP WEIGHT (LBS.)
187625	MM-25	4.3	1	1/4	2	9-1/4	3'3"	61	6-3/32	4-1/2
187626	MM-26	4.3	1	1/4	2	9-1/4	10	61	6-3/32	9
187650	MM-50	5	1	1/2	1-3/64	10-1/4	5	75	11-3/16	8
187651	MM-51	5	1	1/2	1-3/64	10-1/4	10	75	11-3/16	12
187652	MM-52	5	1	1/2	1-3/64	10-1/4	15	75	11-3/16	14
187653	MM-53	5	1	1/2	1-3/64	10-1/4	20	75	11-3/16	17
187575	MM-75	6.3	1	3/4	1-3/16	9-3/4	5	48-1/2	10-5/64	13-1/2
187510	MM-751	6.3	1	3/4	1-3/16	9-3/4	10	48-1/2	10-5/64	17
187520	MM-752	6.3	1	3/4	1-3/16	9-3/4	20	48-1/2	10-5/64	23
187519	MM-755	6.3	1	3/4	1-3/16	9-3/4	15	48-1/2	10-5/64	25
187515	MM-150	7.1	1	1-1/2	1	13	5	51	17-5/16	23-1/2
187511	MM-151	7.1	1	1-1/2	1	13	10	51	17-5/16	28
187525	MM-155	7.1	1	1-1/2	1	13	15	51	17-5/16	33-1/2
187521	MM-152	7.1	1	1-1/2	1	16-3/4	20	51	17-5/16	35-1/2
187530	MM-300	9.5	1	3	1/2	16-3/4	5	75	17-5/16	46
187531	MM-310	9.5	1	3	1/2	16-3/4	10	75	17-5/16	53
187535	MM-355	9.5	1	3	1/2	16-3/4	15	75	17-5/16	56
187532	MM-320	9.5	1	3	1/2	16-3/4	20	75	17-5/16	67-1/2
187560	MM-600	9.5	2	6	3/8	24-1/2	5	79	17-5/16	82
187562	MM-620	9.5	2	6	3/8	24-1/2	20	79	17-5/16	121