


FS-1636N / FS-1652N

SBR-8

METAL FORMING

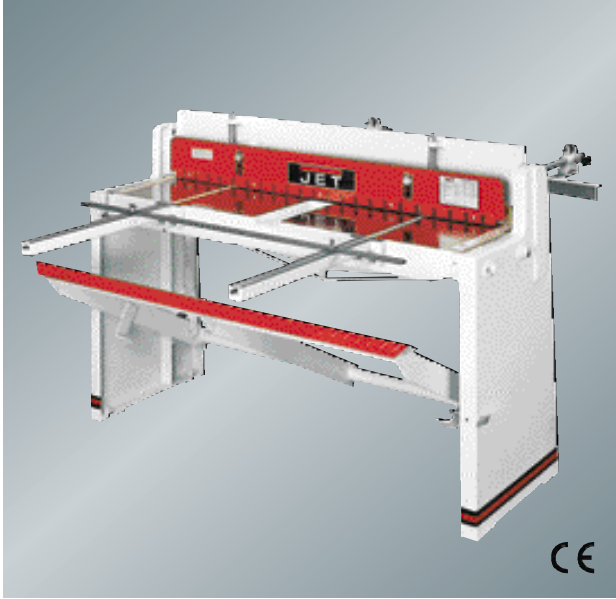

FS-1636N FS-1652N FOOT SHEERS

- ◆ Ideal for precision shearing of mild steel up to 1.6 mm
- ◆ Can also be used on aluminum, brass, copper, lead, plastic and zinc
- ◆ Two-way blade configuration provides twice the cutting life
- ◆ Two-way blade at the top, one-way blade at the bottom
- ◆ 2° angle cutting edge; 1° face relief

SBR-8 COMBINATION SHEAR AND BRAKE

- ◆ Combination shear and break in one compact machine
- ◆ Shear can be used for mild steel, aluminium, brass, copper, lead, plastic and zinc
- ◆ Two-way blade configuration provides twice the cutting life

Stock number	754636	754652
Model	FS-1636N	FS-1652N
Max. sheet capacity		
Stainless steel	0.9 mm	0.9 mm
Steel St 37, C15	1.0 mm	1.0 mm
Mild-steel, copper, brass	1.6 mm	1.6 mm
Mild-copper, aluminium alloy	1.8 mm	1.8 mm
Mild-aluminum, Zinc	2.5 mm	2.5 mm
Plycarbonate PC	3 mm	3 mm
ABS	5 mm	5 mm
Max. length capacity	915 mm	1320 mm
Back gauge capacity	645 mm	645 mm
Front gauge capacity	710 mm	710 mm
Dimensions (LxWxH)	1180 x 540 x 1050 mm	1590 x 540 x 1050 mm
Weight	370 kg	460 kg

Stock number	50000095
Model	SBR-8
Max. sheet capacity	
Mild-steel	1.0 mm
Mild-aluminum	1.8 mm
Copper	1.0 mm
ABS	2.5 mm
Tin plate	1.0 mm
Brass	1.0 mm
Max. cut- and bendlength	200 mm
Dimensions (LxBxH)	360 x 220 x 250 mm
Weight	15 kg