


Ausziehbare Spänewanne

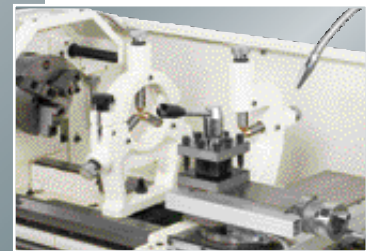

Steady rest and follow rest

GH-1440W-3 METAL LATHE WITH 3-AXIS DIGITAL READOUT

- ◆ JET-exclusive acceptance report with certified tolerances (DIN 8606)
- ◆ Induction-hardened and ground cast iron gantry bed
- ◆ Gear box makes it possible to cut a number of threads without changing the gears
- ◆ Permanently lubricated main, feed and clutch gear
- ◆ Hardened and ground gears in headstock and gear box
- ◆ Standard inch and metric graduation
- ◆ Guides adjustable without play via V-ledges
- ◆ Max. slide reversal clearance 0.1 mm
- ◆ Transversal adjustment of tailstock for taper cuts
- ◆ Tailstock sleeve and hand wheel with adjustable precision scale
- ◆ Adjustable feed clutch
- ◆ Touch control operation

Standard equipment

- ◆ Robust iron cast machine stand
- ◆ 160 mm three-jaw chuck with basic and reversing jaws
- ◆ 200 mm 4-jaw independent chuck
- ◆ 300 face plate
- ◆ 4-way tool post with indexing function
- ◆ Steady rest and follow rest
- ◆ Pull-out chip tray on front
- ◆ Foot brake with limit switch
- ◆ Coolant system
- ◆ Halogen machine light
- ◆ Pull-out bed gap section
- ◆ Set of change gears
- ◆ 2 fixed center tips MT-3
- ◆ Levelling elements
- ◆ Reduction sleeve MT-5/MT-3

- ◆ Chuck guard with limit switch
- ◆ Longitudinal stop with fine adjustment
- ◆ Threading dial
- ◆ Operating tools in tool box
- ◆ With 3-Axis Digital Readout

Stock number 400V	50000720T
Model	GH-1440W-3
Swing over bed	356 mm (max. 508 mm)
Diameter over transverse slide	216 mm
Center distance	1015 mm
Center height	178 mm
Headstock	MT-5
Spindle port: Camlock	DIN 55029 D1-4
Spindle passage	38 mm
Max. tool size	16 x 16 mm
Transverse slide travel	162 mm
Compound rest travel	89 mm
Speeds: 12	40–1800 rpm
Tailstock ram travel	120 mm
Tailstock taper	MT-3
Feed rate: 48	0.04–0.6 mm/r
Metric threads: 22	0.4–7 mm/r
Inch threads: 28	4–56 TPI
Capacity of steady rest	95 mm
Capacity of follow rest	70 mm
Dimension (LxWxH)	1873 x 750 x 1200 mm
Width of lathe bed	267 mm
Motor power output	3 HP / S: 100%
Motor power input	5.7 HP / S: 40%
Weight	995 kg

More accessories see site 42-47