


GH-1340A

LATHES



Adjustable graduated collars and chrome-plated hand wheels

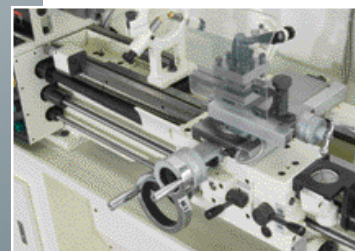

Ergonomic-design operation

GHB-1340A METAL LATHE WITH 3-AXIS DIGITAL READOUT

- ◆ JET-exclusive acceptance report with certified tolerances (DIN 8606)
- ◆ Induction-hardened and ground cast iron gantry bed
- ◆ Gear box makes it possible to cut a number of threads without changing the gears
- ◆ Permanently lubricated main, feed and apron gear
- ◆ Hardened and ground gears in the headstock
- ◆ Guides adjustable without play via V-ledges
- ◆ Transversal adjustment of tailstock for taper cuts
- ◆ Right or left-handed rotation
- ◆ Adjustable feed clutch
- ◆ Touch control operation

Standard equipment

- ◆ 160 mm three-jaw chuck with basic and reversing jaws
- ◆ 200 mm 4-jaw independent chuck
- ◆ 300 face plate
- ◆ 4-way tool post with indexing function
- ◆ Steady rest and follow rest
- ◆ Chip tray with splash guard
- ◆ Threading dial
- ◆ Operating tools in tool box
- ◆ Machine stand and levelling elements
- ◆ Chuck guard with limit switch
- ◆ Pull-out bed gap section
- ◆ 2 fixed MT-3 center tips

- ◆ MT-5/MT-3 reducing sleeve
- ◆ Set of change gears
- ◆ With 3-Axis Digital Readout

Stock number 400V	50000710T
Model	GHB-1340A
Swing over bed	330 mm (max. 476 mm)
Diameter over transverse slide	197 mm
Center distance	1015 mm
Center height	166 mm
Headstock	MT-5
Spindle port: Camlock	DIN 55029 D1-4
Spindle passage	38 mm
Max. tool size	16 x 16 mm
Transverse slide travel	160 mm
Compound rest travel	70 mm
Speeds: 8	70–2000 rpm
Tailstock ram travel	95 mm
Tailstock taper	MT-3
Feed rate	0.045–0.826 mm/r
Metric threads: 23	0.45–10 mm/r
Inch threads: 38	3.5–80 TPI
Dimension (LxWxH)	1905 x 762 x 1200 mm
Width of lathe bed	188 mm
Motor power output	2 HP / S ₁ 100%
Motor power input	3.8 HP / S ₆ 40%
Weight	650 kg

More accessories see site 42-47