



Coolant system standard!

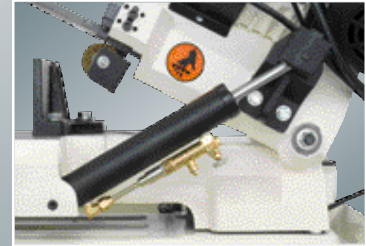

Fully adjustable hydraulic downfeed

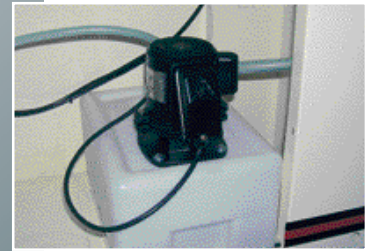

Coolant system standard

CE

HVBS-812RK – METAL BANDSAW


- ◆ Large handwheel and built-in gauge for easy blade tensioning
- ◆ Blade guides feature parallel double raw ball bearing support
- ◆ Quick-positioning vise with fully adjustable jaws swivels to 45°
- ◆ Fully adjustable hydraulic downfeed with separate on/off valve
- ◆ Integrated coolant system
- ◆ Powerful motor 1 HP output
- ◆ The machine is built according to the european standards
- ◆ 4 blade speeds allows cutting of different materials
- ◆ High-quality bi-metal saw blade with dual-pitch tooth division
- ◆ Brass brush wheel for saw blade cleaning

Standard equipment

- ◆ Bi-metal saw blade
- ◆ Material stops
- ◆ Automatic shut-off after cut
- ◆ Adjustable end-stops
- ◆ Complete coolant system

Stock number 230V	50000301M
Stock number 400V	50000301T
Model	HVBS-812RK
Cutting capacity 90°	<ul style="list-style-type: none"> Ø 200 mm □ 180 mm □ 305 x 180 mm
Cutting capacity 45°	<ul style="list-style-type: none"> Ø 125 mm □ 120 mm
Size of saw blade	20 x 0.9 x 2362 mm
Vise adjustment	0–45°
Diameter of blade wheels	290 mm
Blade speeds: 4	25, 40, 60, 80 m/min
Motor: 230 V power output	1 HP / S _i 100%
Motor: 230 V power input	1.76 HP / S _e 40%
Motor: 400 V power output	1 HP / S _i 100%
Motor: 400 V power input	1.9 HP / S _e 40%
Coolant system	8 Liter
Coolant pump	0.13 HP / S _i 100%
Dimensions (LxWxH)	1250 x 440 x 1100 mm
Weight	160 kg

Accessories



- ◆ C123.220.2362 Bi-metal saw blade 8/12 TPI