



Coolant system standard!

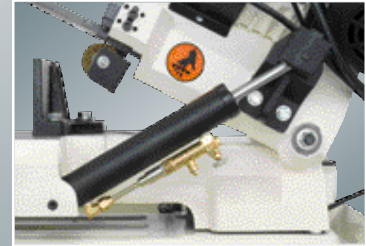

Fully adjustable hydraulic downfeed

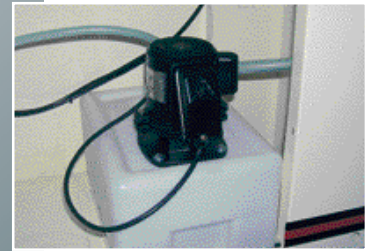

Coolant system standard

CE

### HVBS-812RK – METAL BANDSAW


- ◆ Large handwheel and built-in gauge for easy blade tensioning
- ◆ Blade guides feature parallel double raw ball bearing support
- ◆ Quick-positioning vise with fully adjustable jaws swivels to 45°
- ◆ Fully adjustable hydraulic downfeed with separate on/off valve
- ◆ Integrated coolant system
- ◆ Powerful motor 1 HP output
- ◆ The machine is built according to the european standards
- ◆ 4 blade speeds allows cutting of different materials
- ◆ High-quality bi-metal saw blade with dual-pitch tooth division
- ◆ Brass brush wheel for saw blade cleaning

#### Standard equipment

- ◆ Bi-metal saw blade
- ◆ Material stops
- ◆ Automatic shut-off after cut
- ◆ Adjustable end-stops
- ◆ Complete coolant system

<b>Stock number 230V</b>	<b>50000301M</b>
<b>Stock number 400V</b>	<b>50000301T</b>
<b>Model</b>	<b>HVBS-812RK</b>
<b>Cutting capacity 90°</b>	<ul style="list-style-type: none"> <li>Ø 200 mm</li> <li>□ 180 mm</li> <li>□ 305 x 180 mm</li> </ul>
<b>Cutting capacity 45°</b>	<ul style="list-style-type: none"> <li>Ø 125 mm</li> <li>□ 120 mm</li> </ul>
<b>Size of saw blade</b>	20 x 0.9 x 2362 mm
<b>Vise adjustment</b>	0–45°
<b>Diameter of blade wheels</b>	290 mm
<b>Blade speeds: 4</b>	25, 40, 60, 80 m/min
<b>Motor: 230 V power output</b>	1 HP / S <sub>r</sub> 100%
<b>Motor: 230 V power input</b>	1.76 HP / S <sub>e</sub> 40%
<b>Motor: 400 V power output</b>	1 HP / S <sub>r</sub> 100%
<b>Motor: 400 V power input</b>	1.9 HP / S <sub>e</sub> 40%
<b>Coolant system</b>	8 Liter
<b>Coolant pump</b>	0.13 HP / S <sub>r</sub> 100%
<b>Dimensions (LxWxH)</b>	1250 x 440 x 1100 mm
<b>Weight</b>	160 kg

#### Accessories



- ◆ C123.220.2362 Bi-metal saw blade 8/12 TPI