



## JMD-1

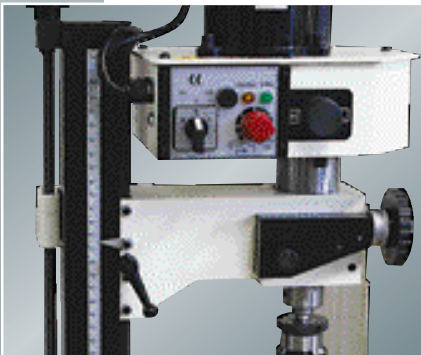

Variable speed control with right/left-handed rotation and 2-step gear box

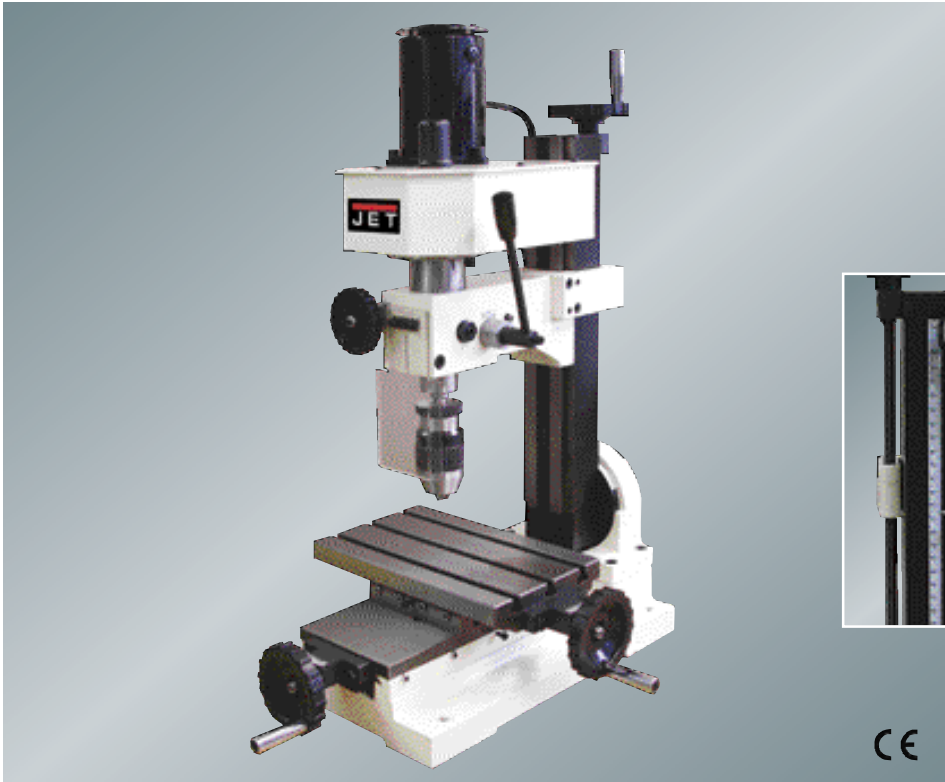

## JMD-1 – MILLING / DRILLING CENTER

- ◆ Cast iron design for vibration free operation
- ◆ Powerful 150W DC-motor
- ◆ Variable speed range 100-2000 rpm in 2 steps
- ◆ Left hand spindle rotation allows tapping operations
- ◆ Right/left-tiltable column for flexible work
- ◆ Compound table precision machined with adjustable dovetail guides

### Standard equipment

- ◆ Variable speed control with 2-step gear box
- ◆ Micro adjustable spindle downfeed
- ◆ Draw bar M10
- ◆ 1-10 mm keyless chuck with MT-2 arbour
- ◆ Drilling and milling guard

Stock number 230V	5000020M
<b>Model</b>	JMD-1
<b>Drilling/tapping capacity (ST 37)</b>	∅ 10 mm / M6
<b>Cutting capacity of face mill</b>	∅ 20 mm
<b>Cutting capacity of end mill</b>	∅ 10 mm
<b>Distance spindle to column</b>	140 mm
<b>Max. distance between spindle and table</b>	210 mm
<b>Spindle taper</b>	MT-2 / M10
<b>Spindle speeds: variable</b>	100-1000 / 200-2000 rpm
<b>Spindle stroke</b>	30 mm
<b>Column tilting range</b>	45° / 45°r
<b>Max. table stroke x-axis</b>	190 mm
<b>Max. table stroke y-axis</b>	100 mm
<b>Table size</b>	145 x 240 mm
<b>Number of T-slots in table</b>	3 / 8 mm
<b>Motor power output</b>	0.2 HP / S <sub>e</sub> 100%
<b>Motor power input</b>	0.35 HP / S <sub>e</sub> 40%
<b>Dimension (LxWxH)</b>	550 x 450 x 630 mm
<b>Weight</b>	40 kg

### Accessories



- ◆ 5000025 Machine vise 50 x 50 mm



- ◆ 5000026 Rotary table Dia 100 mm

More accessories see site 28-29