




Jointing fence tilts $\pm 45^\circ$ – for maximum protection, also when cutting chamfers

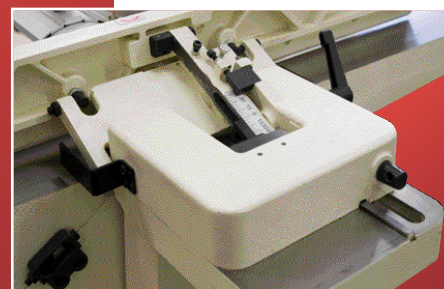

Easy-to-operate cast iron jointing fence

54A / 60A – PLANER 150/200 mm


- ◆ Extra large, 1700 x 200 mm (1820 x 230 mm, 60A) cast iron table with a polished surface
- ◆ 960 mm solid cast iron fence
- ◆ Fence tilts 45° to each side for safe chamfering operation
- ◆ Positive stops at $\pm 45^\circ$ and 90°
- ◆ New quick adjustment lever on infeed table for precision cuts
- ◆ Maximum 8 mm depth of cut
- ◆ 3 high-speed steel knives with micro adjustment for a superior finish

Standard equipment

- ◆ Set of three high-speed steel knives
- ◆ 100 mm dust port
- ◆ On/Off switch with no voltage release
- ◆ Precision fence
- ◆ Adjustable cutterhead guard
- ◆ 2 push blocks
- ◆ "BG" dust emission inspected

Stock number 230V	179127M	10000240M
Stock number 400V		10000240T
Model	54A	60A
Cutting width	150 mm	200 mm
Cutter head speed	5500 rpm	5500 rpm
Cutter head diameter	63 mm	78 mm
Number of knives	3	3
Max. full width depth of cut	8 mm	8 mm
Cuts per minute	16.500	16.500
Table size	1700 x 200 mm	1820 x 230 mm
Fence (HxL)	120 x 960 mm	120 x 960 mm
Tilting range of fence	$+45^\circ/90^\circ/-45^\circ$	$+45^\circ/90^\circ/-45^\circ$
Motor: 230 V power output	1 HP / S ₁ 100%	1.5 HP / S ₁ 100%
Motor: 230 V power input	1.8 HP / S ₆ 40%	2.7 HP / S ₆ 40%
Motor: 400 V power output		2 HP / S ₁ 100%
Motor: 400 V power input		3.8 HP / S ₆ 40%
Weight	130 kg	160 kg


Accessories



- ◆ 10000242 Set of 3 HSS knives 150 mm
- ◆ 10000241 Set of 3 HSS knives 200 mm



- ◆ 6285917 Push block



- ◆ 708118 Mobile base up to 250 kg

- ◆ 708495 Helping stand