



VBS-18MW

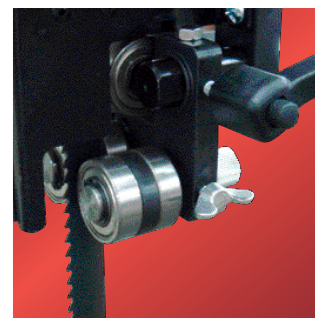

Adjustable 5-point ball bearing guides

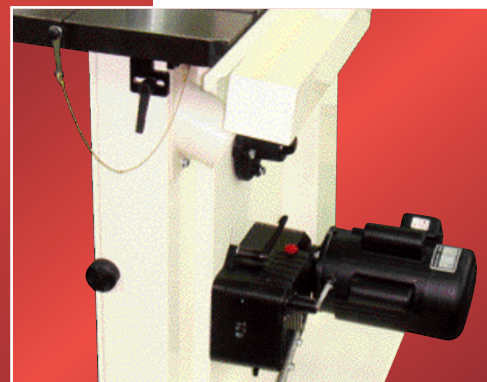

2 step gear box

CE

VBS-18MW – METAL WOOD BANDSAW

- ◆ 2 speed gear box allows ideal cutting speeds for wood and metal
- ◆ 2 chip trays allow the separate collection of metal cutting chips
- ◆ Adjustable 5-point ball bearing guides
- ◆ Precise and simple adjustment of the cutting height or upper blade guide using large-size handwheels and a rack system
- ◆ Standard built-in cutting height scale to read the exact depth of the cut
- ◆ Simple blade change
- ◆ Viewing window for easy blade tracking control
- ◆ Precision T-style fence assembly and parallel cutting device for special cutting jobs
- ◆ Extra large cast iron table, tilts to each side
- ◆ Balanced cast iron wheels with curved, long-life PU tire

Standard equipment

- ◆ On/Off switch with no voltage release
- ◆ Adjustable mitre gauge $\pm 60^\circ$
- ◆ Precision fence
- ◆ Bandsaw blade, 20 mm for wood and metal with 8 TPI pitch
- ◆ 2 chip trays
- ◆ 100 mm dust port

Stock number 230V	414418M
Stock number 400V	414418T
Model	VBS-18MW
Depth of cut	300 mm
Width of cut	460 mm
Min. blade	3 mm
Max. blade	30 mm
Blade length	3480 mm
Table size	485 x 485 mm
Table tilt	45° to -10°
Adjustable stop at	90°
Table height	950 mm
Wheel diameter	470 mm
Blade speeds Wood	250 / 450 / 820 m/min
Blade speeds Metal	20 / 40 / 70 m/min
Overall dimensions	970 x 1070 x 1900 mm
Motor: 230 V power output	1.75 HP / S _i 100%
Motor: 230 V power input	3 HP / S _e 40%
Motor: 400 V power output	2 HP / S _i 100%
Motor: 400 V power input	3.8 HP / S _e 40%
Weight	210 kg

Accessories

- | | | | |
|--------------------------------------|---|------------------|---|
| ◆ 708118
Mobile base up to 250 kg | Bandsaw blades for wood (blade thickness: 0,7 mm) | | Bandsaw blade for wood and metal (20 x 0,7 x 3480 mm) |
| | ◆ 10000181 3 mm | ◆ 10000186 20 mm | ◆ 10000191 8 TPI |
| | ◆ 10000182 6 mm | ◆ 10000187 25 mm | |
| | ◆ 10000183 10 mm | ◆ 10000188 30 mm | |
| | ◆ 10000185 16 mm | | |