


FLAT EYE AND TWISTED EYE WEB SLINGS

- Ideal for use with hoisting and rigging irregular or bulky loads
- Lightweight, flexible and easy-to-handle
- Heavy-duty 2-ply polyester webbing
- Red color warning core provides easy-to-notice warning for sling replacement
- Tapered eyes are reinforced to resist abrasion
- Type 3 (flat eye) or Type 4 (twisted eye) slings available
- Proof tested with test certificate
- Complies with OSHA and ANSI/ASME B30.9 standards

WARNING

Do not exceed rated load or working load limits. Read owners manual for additional warnings and precautions. Failure to read, understand and follow all instructions could result in serious injury. Inspect sling before each use and do not use if damaged.

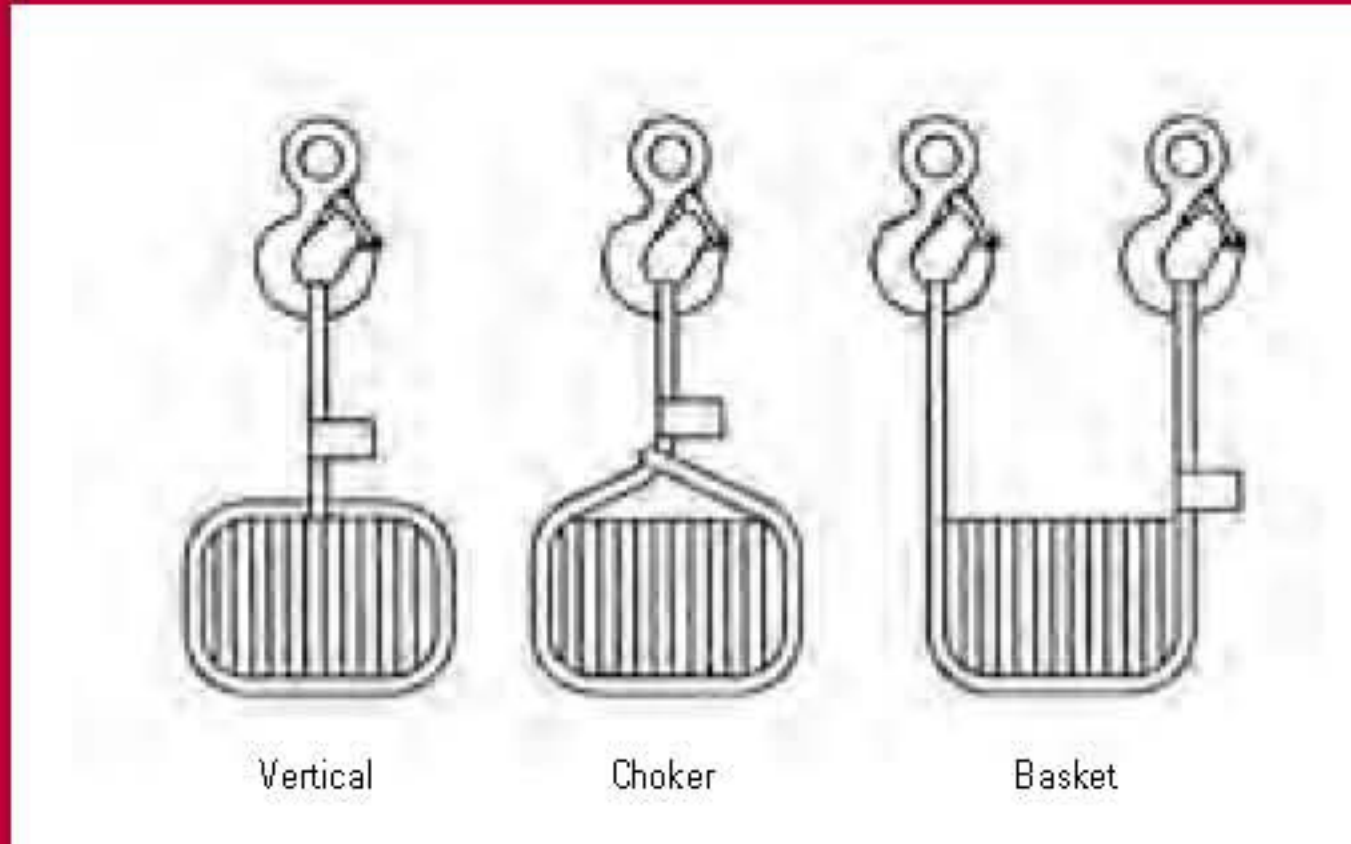

FLAT EYE, TYPE 3, 2-PLY POLYESTERWEB SLING

STOCK NO.	MODEL	WIDTH (IN.)	LENGTH (IN.)	CAPACITY (LBS.) VERTICAL	CHOKER	BASKET	SHIPWEIGHT (LBS.)	CARTON PACK
252300	WSFE-2-6	2	6	6400	5000	12,800	2	1
252301	WFSE-2-8	2	8	6400	5000	12,800	3	1
252302	WSFE-2-10	2	10	6400	5000	12,800	4	1
252310	WSFE-3-6	3	6	8600	6900	17,200	3	1
252311	WSFE-3-8	3	8	8600	6900	17,200	4	1
252312	WSFE-3-10	3	10	8600	6900	17,200	5	1
252320	WSFE-4-8	4	8	11,500	9200	23,000	5	1
252321	WSFE-4-10	4	10	11,500	9200	23,000	6	1
252322	WSFE-4-12	4	12	11,500	9200	23,000	7	1

TWISTED EYE, TYPE 4, 2-PLY POLYESTERWEB SLING

STOCK NO.	MODEL	WIDTH (IN.)	LENGTH (IN.)	CAPACITY (LBS.) VERTICAL	CHOKER	BASKET	SHIPWEIGHT (LBS.)	CARTON PACK
252330	WSTE-2-6	2	6	6,400	5,000	12,800	2	1
252331	WSTE-2-8	2	8	6,400	5,000	12,800	3	1
252332	WSTE-2-10	2	10	6,400	5,000	12,800	3	1
252340	WSTE-3-6	3	6	8,600	6,900	17,200	3	1
252341	WSTE-3-8	3	8	8,600	6,900	17,200	4	1
252342	WSTE-3-10	3	10	8,600	6,900	17,200	5	1
252350	WSTE-4-8	4	8	11,500	9,200	23,000	6	1
252351	WSTE-4-10	4	10	11,500	9,200	23,000	6	1
252352	WSTE-4-12	4	12	11,500	9,200	23,000	8	1