


**JHJ SERIES HEAVY-DUTY INDUSTRIAL BOTTLE JACKS**

- For lifting, pushing, spreading, bending, pressing or straightening requirements
- Not affected by temperature extremes
- Low profile truck models or standard models
- Electrically welded base and cylinders to assure strength and eliminate leaks
- All models work in upright, angle or horizontal position
- Pump handle included
- Carrying handles on 12-1/2- to 100-ton models
- Complies with ANSI/ASME B30.1 and PALD-1 standards

**NOTE**

When used at an angle or in the horizontal position, the pump must be in upright position and piston movement is reduced.

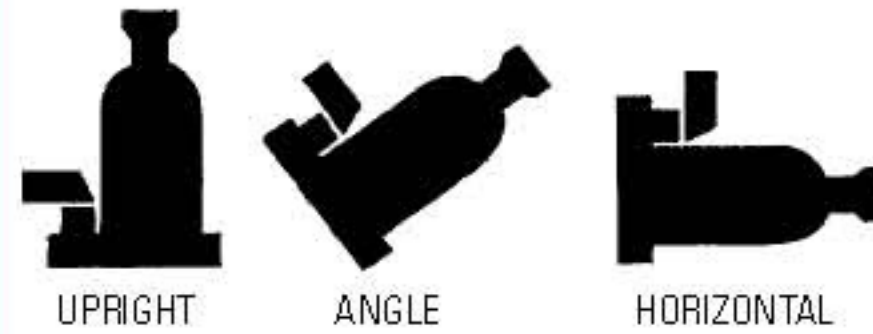


STOCK NO.	MODEL	RATED CAP'Y (TON)	MINIMUM HEIGHT (IN.)	PISTON HEIGHT (IN.)	HEAD SCREW (H/IN.)	MAX. HEIGHT (IN.)	BASE SIZE (LXW/IN.)	SHIP WEIGHT (LBS.)	CARTON PACK
453301	JHJ-2	2	7-1/8	4-1/2	2	13-5/8	4-1/2 x 2-1/2	5	1
453303	JHJ-3	3	7-1/2	4-1/2	2-3/8	14-3/8	4-9/16 x 2-13/16	6	1
453305	JHJ-5	5	7-7/8	4-5/8	2-3/4	15-1/2	5-5/8 x 3-1/4	9	1
453308	JHJ-8	8	7-7/8	4-5/8	2-3/4	15-1/2	6 x 3-1/2	13	1
453312	JHJ-12 1/2	12-1/2	9-1/2	5-7/8	3-1/8	18-1/2	6-1/2 x 4-1/8	18	1
453313K	JHJ-12 1/2L	12-1/2	6-3/4	3-3/4	3	13-3/8	6-1/2 x 4-1/8	15	1
453317	JHJ-17 1/2	17-1/2	10-3/8	6-1/2	3-1/8	20	7-1/8 x 4-5/8	24	1
453318K	JHJ-17 1/2L	17-1/2	6-3/4	3-1/2	2-3/4	13	7-1/8 x 4-5/8	19	1
453322	JHJ-22 1/2	22-1/2	10-5/8	6-1/4	-	16-7/8	7-1/8 x 5-1/2	28	1
453323K	JHJ-22 1/2L	22-1/2	7-1/8	3-3/8	1-1/2	12	7-1/4 x 5-1/16	23	1
453335K	JHJ-35	35	11	6-1/4	-	17-1/4	8-3/8 x 5-1/2	48	1
453360K	JHJ-60	60	12	6-3/4	-	8-5/8	9-1/4 x 7-3/8	82	1
453399K	JHJ-100	100	12	5-23/32	-	17-11/16	14-31/32 x 10-7/16	225	1

**SBJ SERIES HEAVY-DUTY BOTTLE JACKS**

- Chromed pump piston and ram for added rust resistance
- Electrically welded base and cylinders
- All models work in upright, angle or horizontal positions
- Pump handle included with all models
- Carrying handle on 12- through 35-ton models
- Complies with ANSI/ASME PALD-1 and B30.1 standards

**NOTE**

When used at an angle or in the horizontal position, the pump must be in upright position and piston movement is reduced.

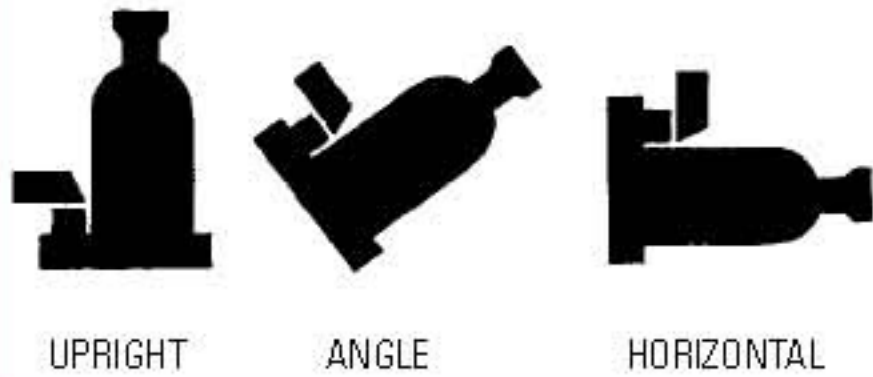

STOCK NO.	MODEL	RATED CAP'Y (TON)	MIN. HEIGHT (IN.)	PISTON HEIGHT (IN.)	HEAD SCREW (H/IN.)	MAX. HEIGHT (IN.)	BASE SIZE (LXW/IN.)	SHIP WEIGHT EACH (LBS.)	CARTON PACK
55550	SBJ-2	2	7-1/8	4-1/2	2	13-5/8	4-1/4 x 2-1/2	5	1
455551	SBJ-3	3	7-1/2	4-1/2	2-3/8	14-3/8	5 x 3	6	1
455552	SBJ-5	5	7-7/8	4-5/8	2-3/4	15-1/2	5-5/8 x 3-1/4	9	1
455553	SBJ-8	8	7-7/8	4-5/8	2-3/4	15-1/2	6 x 3-1/2	13	1
455554	SBJ-12	12	9-1/2	5-7/8	3-1/8	18-1/2	6-1/2 x 4-1/8	18	1
455555K	SBJ-12L	12	6-3/4	3-3/4	3	13-3/8	6-1/2 x 4-1/8	15	1
455556	SBJ-22	22	10-5/8	6-1/4	-	16-7/8	7-1/8 x 5-1/2	24	1
455557K	SBJ-22L	22	7-1/8	3-3/8	1-1/2	12	7-1/8 x 5-1/2	19	1