


JSSG-10

## BENCH GRINDER



Shown with accessories:  
 support arm (stock-no. 708039),  
 support arm extension (stock-no. 708040)  
 and optional base (stock-no. 708016)

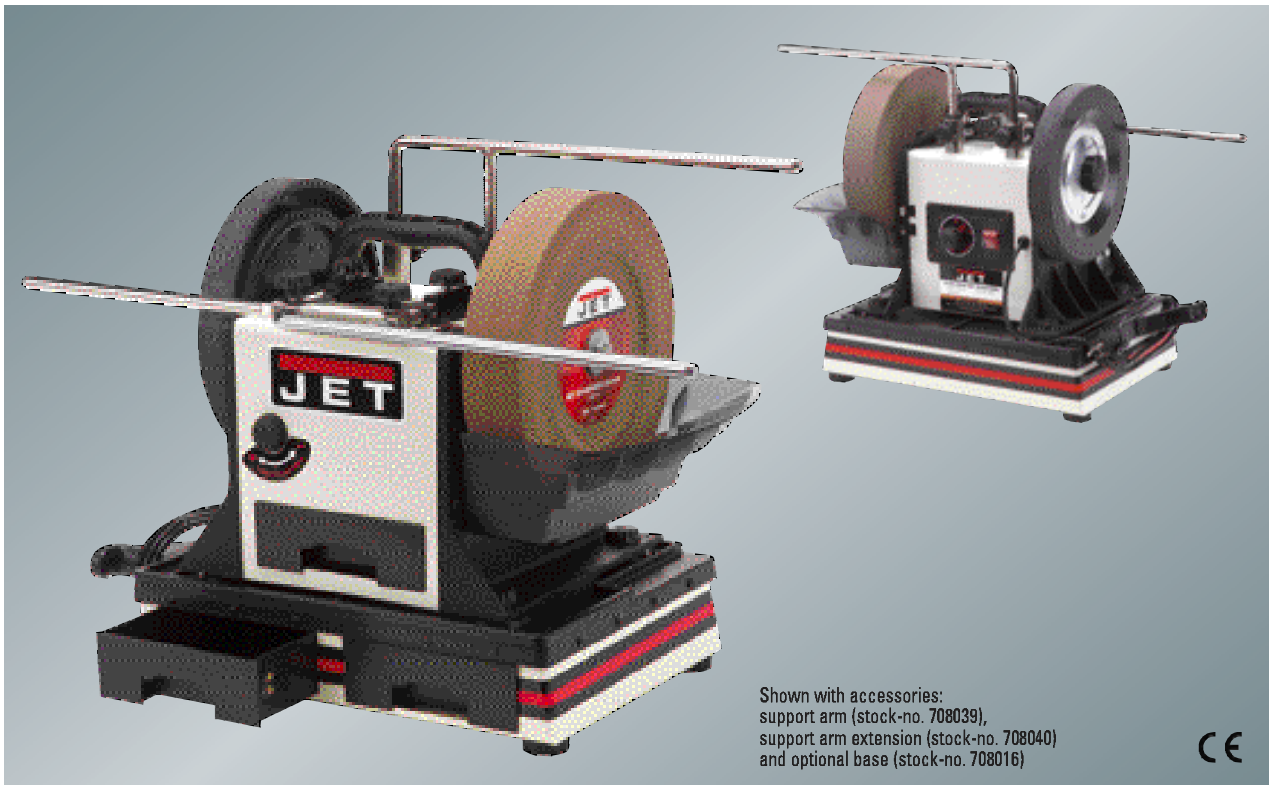

## JSSG-10 – WET SHARPENER

- ◆ The lower portion of the stone runs in a bath of water
- ◆ As the stone revolves it carries the water continuously over the grinding surface, thus cooling it and eliminating the risk of overheating
- ◆ The grindstone runs at 90–150rpm, driven by a quiet running motor
- ◆ Motor speed is controlled by a variable speed switch
- ◆ When the grindstone diameter is 250mm, run the grinder at the lower 90rpm setting
- ◆ Over time with constant use the grindstone will wear, the speed can be increased to compensate for this, so maintaining the optimum surface speed at all times

### Standard equipment

- ◆ A stone grader, applying this changes the stone from coarse to fine and back again
- ◆ A straight edge jig for hand plane blades and chisels
- ◆ An angle setting jig, for precise repeatability
- ◆ A bevel angle measuring device, to measure the existing bevel angle of your tools
- ◆ A tube of honing compound for that final polished edge
- ◆ A support arm to carry the jigs and adjust the angle of attack
- ◆ An instructional DVD is supplied

Stock Number 230V	708015M
Model	JSSG-10
Motor power	160W
Speed: variable	90–150 rpm
Stone wheel	Ø 250 x 50 x Ø 12 mm
Grit	250 g
Leather honing wheel	Ø 230 x 30 mm
Dimensions (LxWxH)	406 x 305 x 330 mm
Weight	15 kg